

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

REVISIONS


REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
D	12256	ADDED: RoHS COMPLIANT TO TITLE OF DRAWING	JS 10/05/15	LA	LN
E	12980	ADDED: NOTE 3 & 4	JS 09/27/16	LA	LN

1 CABLE LENGTH TOLERANCE

≤ 1 FT	±0.5 IN
>1 FT - 5 FT	±0.5 IN
> 5 FT - 10 FT	+4 / -0 IN
>10 FT - 25FT	+6 / -0 IN
>25 FT	+5% / -0%

BNC CONNECTOR

MOLDED STRAIN RELIEF MATERIAL: SANTOPRENE

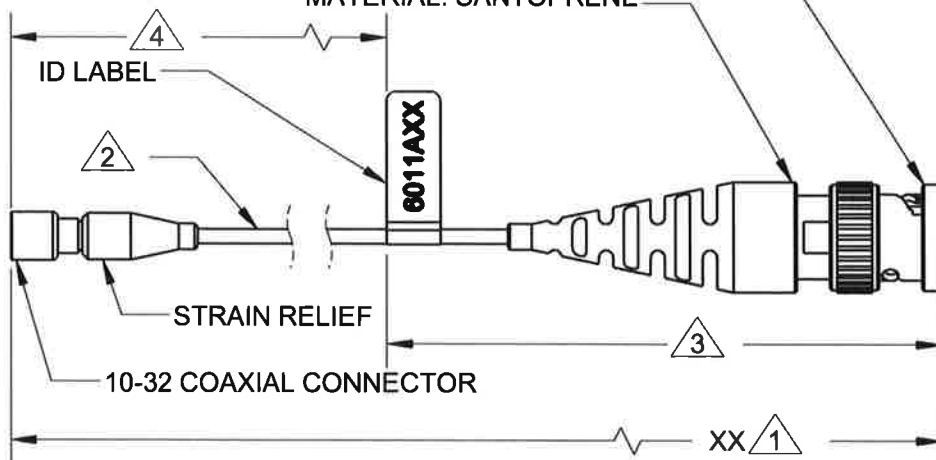

SCHEMATIC DIAGRAM

4 OPERATING TEMPERATURE -55°C TO +200°C (-67°F TO +392°F)

3 OPERATING TEMPERATURE -55°C TO +110°C (-67°F TO +230°F)

2 SEE CABLE SPECIFICATION TABLE

1 MODEL NUMBER 6011AXX, XX DENOTES LENGTH IN FEET
NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED: INTERPRET DIM & TOL PER ASME Y14.5M - 1994. REMOVE BURRS. COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA. CHAM EXT THDS 45° TO MINOR DIA. THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS. THDS PER MIL-S-7742. DIMENSIONS APPLY AFTER FINISHING.	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS TOLERANCES ARE: INCHES METRIC ANGLES .XX ± .03 .X ± 0.8 ± 1° .XXX ± .010 .XX ± 0.25	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	
USED ON	NEXT ASSY
APPLICATION	
THIRD ANGLE PROJECTION USA	
ALL MACHINED SURFACES. TOTAL RUNOUT WITHIN .005. BREAK SHARP EDGES .005 TO .010. MACHINED FILLET RADII .005 TO .015. WELDING SYMBOLS PER AWS A2.4. ABBREVIATIONS PER MIL-STD-12.	

CONTRACT NO.



TITLE: OUTLINE/INSTALLATION DRAWING,
CABLE, 10-32 TO BNC PLUG, MODEL
6011A, RoHS COMPLIANT

APPROVALS		DATE
ORIG	RA	07/18/02
CHK	MPH	07/18/02
APP	CES	07/18/02
APP	DV	01/04/13

SIZE	CAGE CODE	DWG. NO.	REV
A	2W033	127-6011A	E
SCALE: NONE		SOLIDWORKS	SHEET 1 OF 1