


1 CABLE TOLERANCES

ENGLISH		[METRIC]	
≤ 1 FT	+1/-0 IN	≤ 0.3 m	+25 mm -0 mm
>1 FT - 5 FT	+2/-0 IN	> 0.3 m- 1.5 m	+50 mm -0 mm
>5 FT - 10 FT	+4/-0 IN	>1.5 m -3 m	+100 mm -0 mm
>10 FT - 25 FT	+6/-0 IN	> 3 m -7.5 m	+150 mm -0 mm
>25 FT	+5%/-0%	> 7.5 m	+5%/-0%

REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
A	8931	ADDED LABELS	LN 08/01/12	JS	DV
B	10103	UPDATED VIEW TO SHOW ID LABEL CHANGE	AB 06/27/13	JS	RT
C	13719	SEE ECN	RA 09/11/17	AM	W

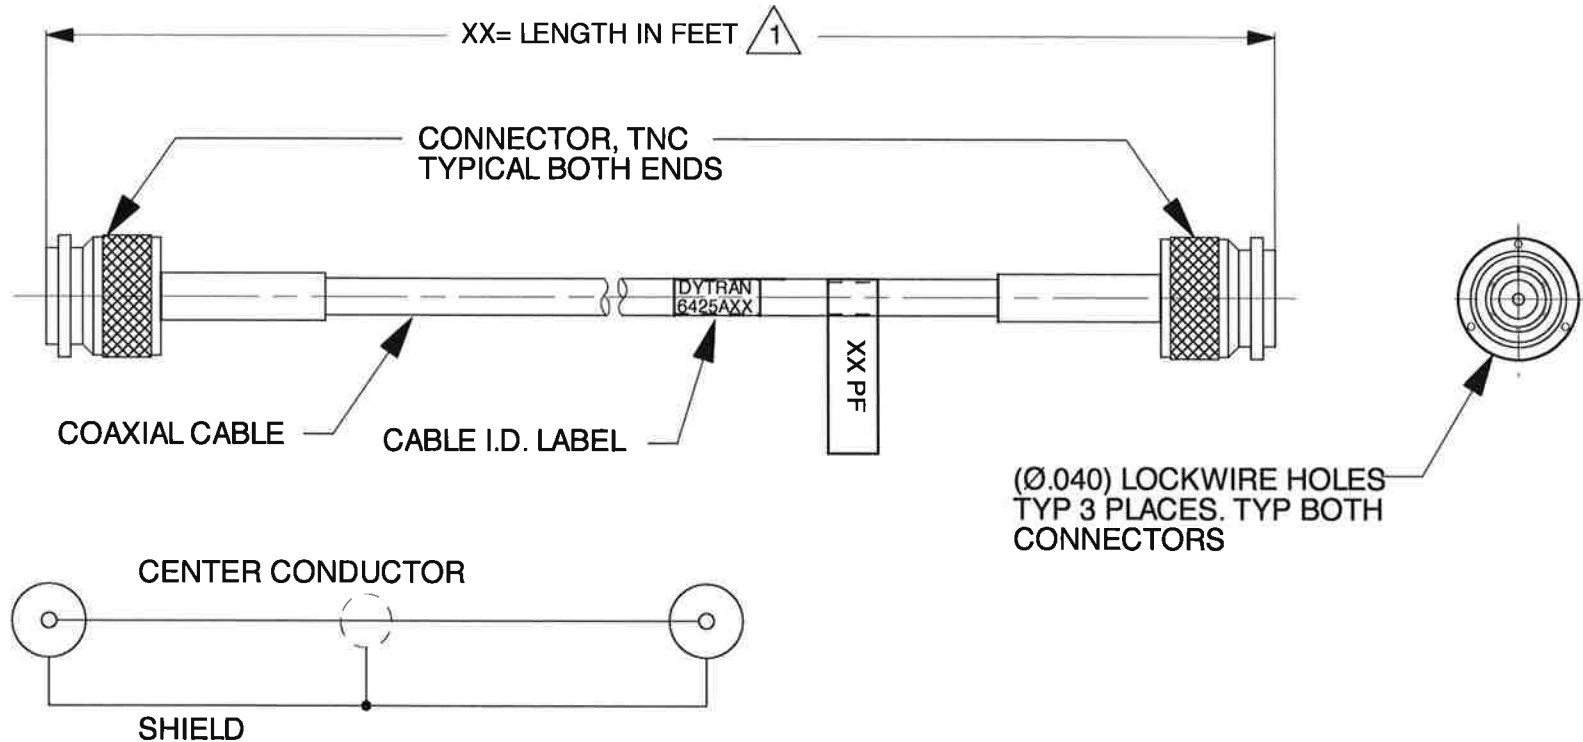

SCHEMATIC DIAGRAM

2. TEMPERATURE RATING: -51°C TO 93°C [-60°F TP 200°F]

1 LENGTH OF CABLE ASSEMBLY IS DESIGNATED BY XX IN NUMBER (6411XX). XX EQUALS CABLE LENGTH IN FEET. (I.E. 6411A10 IS A 10 FT LENGTH CABLE ASSEMBLY)

DYTRAN INSTRUMENTS, INC.		MASTER ONLY IF IN RED		CHATSWORTH, CA	
SCALE	1X	REV	DATE	ECN	
		SEE CHART	SEE CHART	SEE CHART	
DATE	2/23/00	PART NO.	6425AXX		
DRAWN	R.A.	CHECKED	N.C.		
		MAT'L			
APPROVED	N.C.	02/23/00	NEXT ASSEMBLY	USED ON	6425AXX
TITLE				DWG NO.	
OUTLINE INSTALLATION, LOW NOISE, TNC TO TNC MODEL 6425AXX				127-6425A	
				SHEET 1 OF 1	