HS-100S Accelerometer

AC acceleration output via PUR Cable


Key Features

- · Side entry for easy access
- Waterproof
- · Resistant to oil

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical



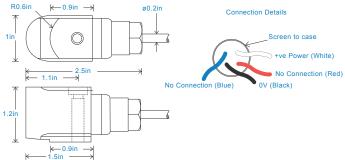

Technical Performance

Mechanical

Case Material Stainless Steel Sensing Element/Construction PZT/Compression Mounting Torque 5.9ft. lbs Mounting Bolt provided see: 'How To Order' table x 1.2in long 185gms (nominal) body only Weight Maximum Cable Length 3,280 ft. Standard Cable Length Shielded Cable PUR - length to be specified with order Mounting Threads see: 'How To Order' table Submersible Depth 328 ft. max (10 bar)


Electrical

Excitation Voltage: 18-30Volts DC Electrical Noise 0.1mg max Current Range 0.5mA to 8mA Bias Voltage 10 - 12 Volts DC Settling Time 2 seconds Output Impedance 200 Ohms max. Case Isolation >108 Ohms at 500 Volts

Environmental

Operating Temperature Range	-22 to 194°F
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

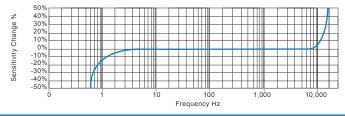


Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

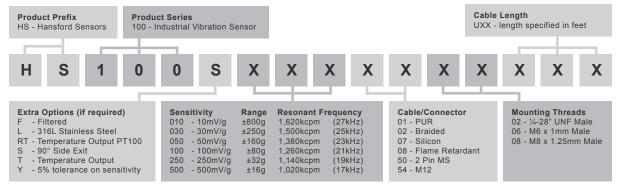



www.hansfordsensors.com sales@hansfordsensors.com

