

D

C

B

A

D

C

B

A

4

3

2



1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

1 CABLE LENGTH TOLERANCE

ENGLISH		[METRIC]	
≤1FT	+1/-0 IN	≤0.3m	+25mm -0mm
>1 FT - 5 FT	+2/-0 IN	.0.3 m-1.5m	+50mm -0mm
> 5 FT - 10 FT	+4/-0 IN	>1.5m-3m	+100mm -0mm
>10 FT - 25FT	+6 / -0 IN	>3m-7.5m	+150mm -0mm
>25 FT	+5% / -0%	>7.5m	+5%/-0%

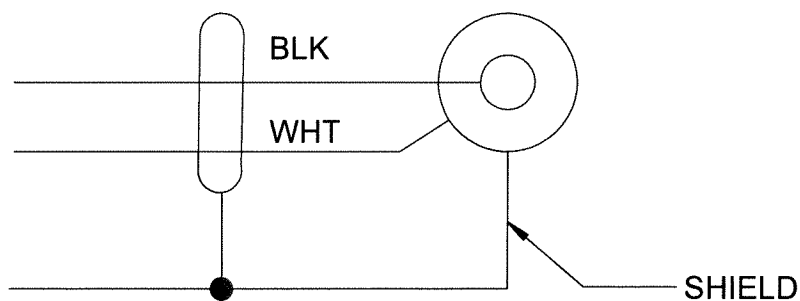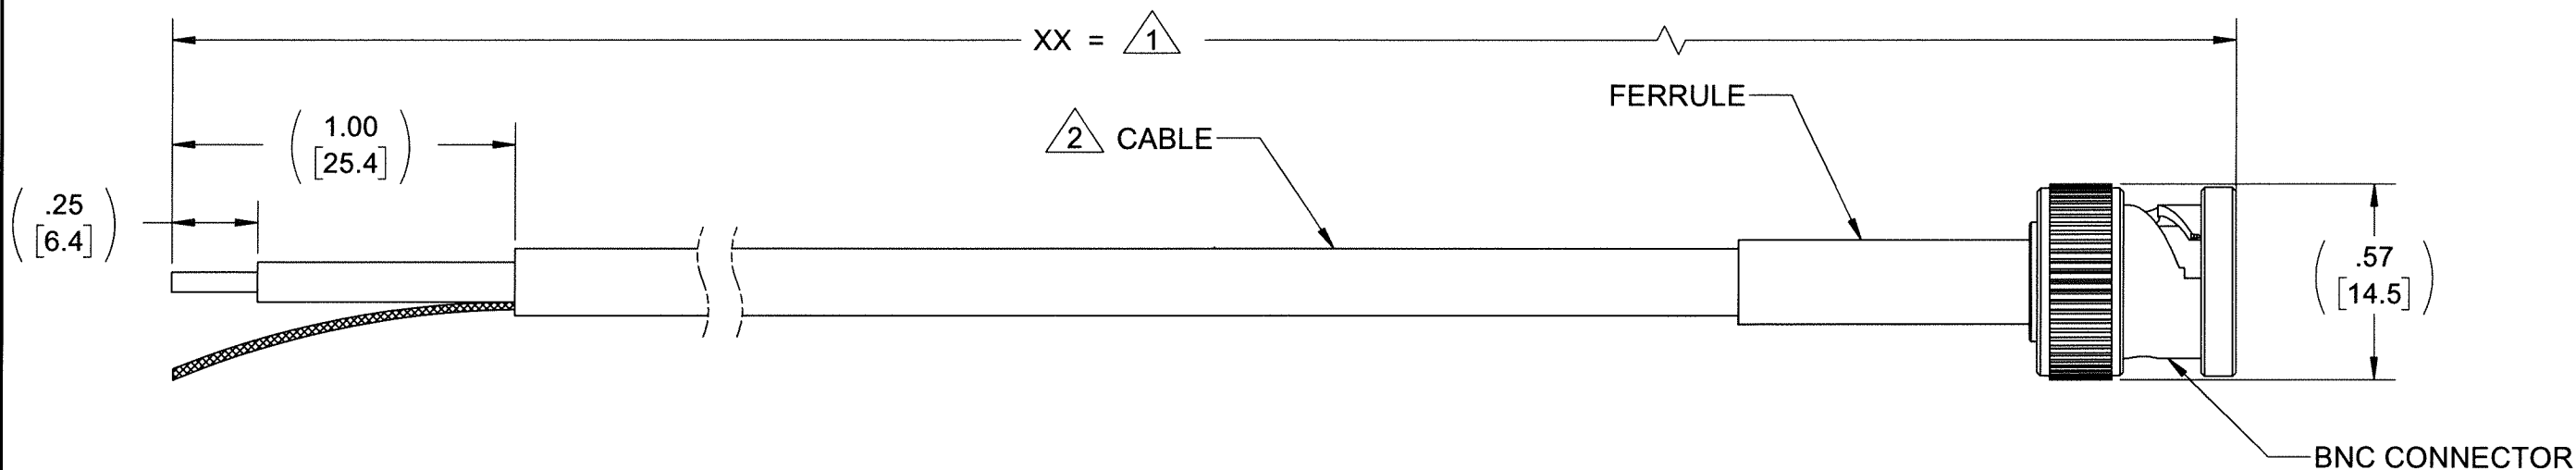

SCHEMATIC

- 2 SEE CABLE SPECIFICATION TABLE.
- 1 PART NUMBER: 6094AXX (XX DENOTES LENGTH IN FEET).

NOTES: UNLESS OTHERWISE SPECIFIED

DWG NO 127-6094A ISH 1 REV D

REVISIONS

REV.	ECN	DESCRIPTION	BY/DATE	CHK	APPR
B	12786	REDRAWN ON SOLIDWORKS	LA 06/30/16	EP	AS
C	13717	RELOCATED OVERALL DIMENSION	RA, 09/13/17	MH	LN
D	14975	SEE ECN	DA, 03/23/19	EP	LN

2 CABLE, COAXIAL, RG58C/U (MIL-C-17)

CENTER CONDUCTOR	20 AWG 19/33 TINNED COPPER CONDUCTOR
INSULATION	POLYETHYLENE Ø.116 ±.004
SHIELD	36 AWG TINNED COPPER BRAIDED SHIELD 95% COVERAGE
JACKET	BLACK PVC, NON CONTAMINATING
DIAMETER	.195 ±.007
TEMPERATURE RATING	-40° C (-40° F) TO +85° C (185° F)

UNLESS OTHERWISE SPECIFIED:
INTERPRET DIM & TOL PER
ASME Y14.5M - 1994.
REMOVE BURRS.
COUNTERSINK INTERNAL THDS
90° TO MAJOR DIA.
CHAM EXT THDS 45° TO MINOR DIA.
THD LENGTHS AND DEPTHS ARE FOR
MIN FULL THDS.
DIMENSIONS APPLY AFTER FINISHING.


ALL MACHINED SURFACES.
TOTAL RUNOUT WITHIN .005.
BREAK SHARP EDGES .005 TO .010.
MACHINED FILLET RADII .005 TO .015.
WELDING SYMBOLS PER AWS A2.4.
ABBREVIATIONS PER MIL-STD-12.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES.
DIMENSIONS IN BRACKETS [] ARE IN
MILLIMETERS TOLERANCES ARE:

DECIMALS METRIC ANGLES
.XX ± .03 X ± 0.8 ± 1°
.XXX ± .010 .XX ± 0.25

APPROVALS		DATE
ORIG	AB	4/15/13
CHK	RA	4/16/13
APP	DV	4/22/13

DO NOT SCALE DRAWING



TITLE: OUTLINE/INSTALLATION
DRAWING, BNC TO PIGTAIL,
MODEL 6094A

SIZE B	CAGE CODE 2W033	DWG NO 127-6094A	REV D
-----------	--------------------	---------------------	----------

SCALE: 2:1 SHEET 1 OF 1

4

3

2

1